



Transport trailer





Mod. G 40 TM RS

- Frame structure consists of cut tube profiles
- Hydraulic tipping device with double effect piston
- Rear foot-board to load machines of 600mm
- Deck made of iron treadplate 30dm
- Axle with mechanical brake
- On-road indication/lighting system

Mod. Dual-mounted tyres 205.75.17,5 used	A cm.	B cm.	C cm.	F cm.	E cm.	Load capacity Kg.
G 40 TM RS 20	400	200	100	75	190	50 Q.li
G 40 TM RS 22	400	220	100	75	210	50 Q.li
G 40 TM RS 23	460	230	100	75	220	50 Q.li
G 40 TM RS 24	450	250	100	75	230	50 Q.li
G 40 TM RS 25	500	250	100	75	230	50 Q.li
G 40 TM RS 26	600	250	100	75	230	50 Q.li

AVAILABILITY OF MANUFACTURE IN VARIOUS SIZES

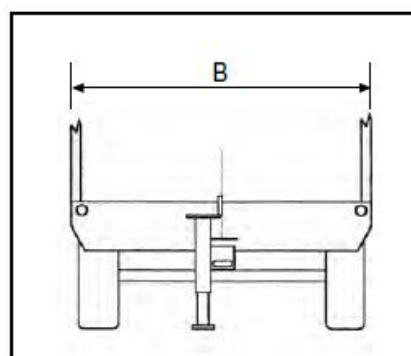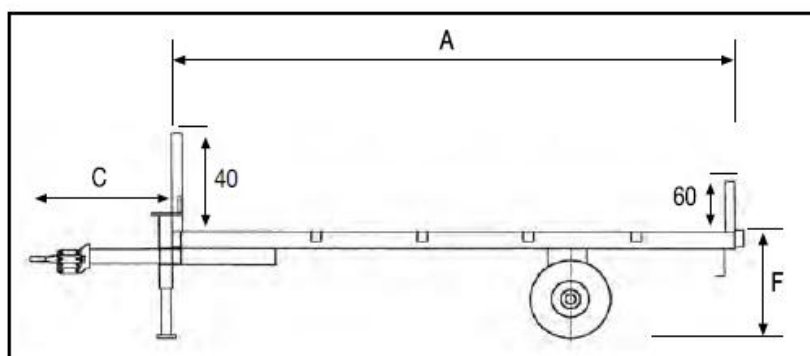

Accessories on request for Mod. G 40 TM RS see page 32-33