



Trailer for the transport of products and equipment

Mod. P.M.G.



- Robust frame for excessively heavy loads
- Hydraulic tipping device with double effect piston
- Rear foot-board to load equipment
- Deck made of iron treadplate 30dm
- On-road indication/lighting system
- Hydraulic front support foot

- Compensating Tandem System

**COSTS OF
BRAKING SYSTEM
TO BE ADDED**

**Accessories
on request:
see page 32-33**

Mod.	A cm.	B cm.	C cm.	F cm.	BRAKING SYSTEM	TYRES	SUSPENSIONS
P.M.G. 60	600	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system fixed rear wheels
P.M.G. 65	650	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system fixed rear wheels
P.M.G. 75	750	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system fixed rear wheels
P.M.G. 80	800	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system fixed rear wheels
P.M.G. 85	850	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system fixed rear wheels





Trailer for the transport of products and equipment

Mod. P.M.G. AS with Steering rear axle



Mod.	A cm.	B cm.	C cm.	F cm.	BRAKING SYSTEM	TYRES	SUSPENSIONS
P.M.G. AS 60	600	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system steering rear wheels
P.M.G. AS 65	650	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system steering rear wheels
P.M.G. AS 75	750	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system steering rear wheels
P.M.G. AS 80	800	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system steering rear wheels
P.M.G. AS 85	850	250	150	90	HYDRAULIC OR PNEUMATIC	245/70 R17.5 USED DUAL-MOUNTED TYRES	tandem system steering rear wheels

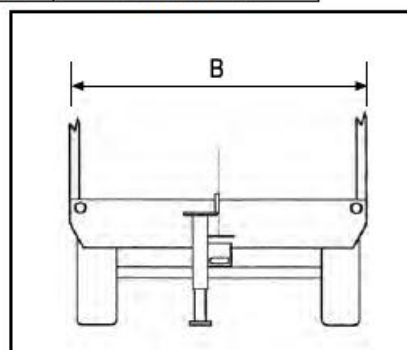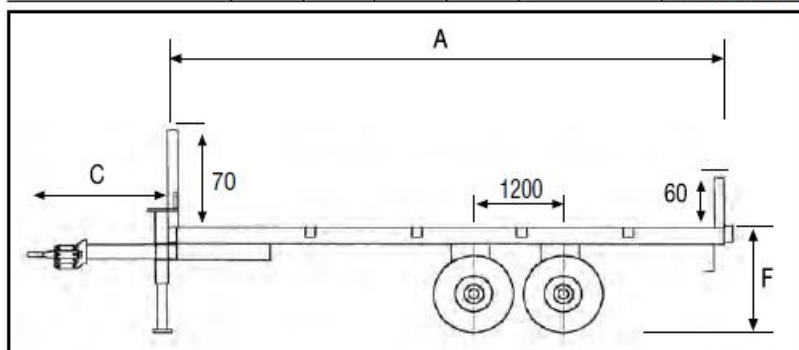

AVAILABILITY OF MANUFACTURE IN VARIOUS SIZES